

User manual

Oneremote converter installed in a Beo4.



OneRemote RMB4 Converter for Beo4

Type 35104354 controls


Apple

MAC PC Apple TV iPod dock





Control Table, daily use.

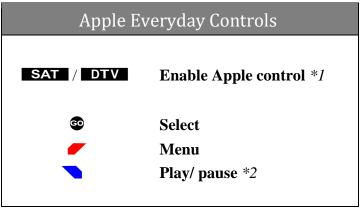

^{*1} Factory preset. Other sources can be used, refer to installation manual.

Pressing the source button on the Beo4 makes two things happen:

- Makes the Beo4 change for control of Apple devices, instead of B&O devices. *3 Press to power on the Apple Device, if it is powered off.
- Sends a socket selection command to your B&O TV or Audio system, making it shift to the input socket at which your Apple device is connected. *4

```
*3

Factory source default is SAT or DTV .
```

*4

Factory default is the socket named **VAUX**.

Refer to the installation manual if another socket is preferred, like PC, AMEM2, AAUX or else.

^{*2} Press 6 seconds to power off an Apple device. Press shortly to power on.



Connecting Apple to a Bang & Olufsen TV, operate with a Beo4.

With this OneRemote RMB4 converter installed in your Bang & Olufsen Beo4 remote control terminal you may control any Apple device, that can be operated with an Apple IR remote control like the ones shown below. Thus both your Apple Devices and your B&O products can be operated at the same time .

This guide explains how.





